




SPECIFICATIONS

Size	Metric	British
Max. Working Height(Indoor)	12.00m	39.4 ft
Max. Working Height(Outdoor)	12.00m	39.4 ft
Max. Platform Height(Indoor)	10.00m	32.8 ft
Max. Platform Height(Outdoor)	10.00m	32.8 ft
Overall Length ©	2.48m	97.6 in
Overall Width D	1.15m	45.3 in
Overall Height(Rails Up)	2.49m	98.0 in
Overall Height(Rails Down)	1.96m	77.1 in
Platform Size(Length×Width)	2.27m×1.12m	89.4×44.1 in
Platform Extension Size ©	0.90m	35.4 in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	3.9 in/0.7 in
Wheelbase (1.87m	73.6 in
Turning Radius(Inside/Outside)	0m/2.20m	0in/86.6 in
Tyres	φ381×127mm	φ15×5 in

Performance		
S.W.L	318kg	700lb
S.W.L On Extension	113kg	250lb
Max. Occupants(Inside/Outside)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	3.5km/h	2.2mph
Travel Speed(Raised)	0.8km/h	0.5mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	55/49sec	55/49sec

Weight			
Overall Weight	3050kg	6710lb	

Power		
Hydraulic Tank	20L	5.3gal
Battery	24V/200Ah	24V/200Ah
Charger	24V/30A	24V/30A
Lifting Motor	15VAC/3.5kW	15VAC/3.5kW

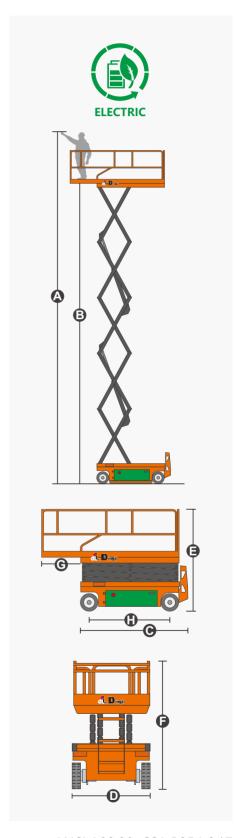

ANSI A92.20, CSA B354.6.17





FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- · Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deging, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











