


SPECIFICATIONS

Size	Metric	British
Max. Working Height(Indoor)	15.70m	51.5 ft
Max. Working Height(Outdoor)	11.00m	36ft
Max. Platform Height(Indoor)	13.70m	45 ft
Max. Platform Height(Outdoor)	9.00m	29.5 ft
Overall Length 6	2.84m	111.8 in
Overall Width (1.25m	49.2 in
Overall Height(Rails Up)	2.62m	103.1 in
Overall Height(Rails Down)	2.09m	82.3 in
Platform Size(Length×Width)	2.64m×1.12m	103.9×44.1 in
Platform Extension Size ©	0.90m	35.4 in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	3.9 in/0.7 in
Wheelbase (2.22m	87.4 in
Turning Radius(Inside/Outside)	0m/2.65m	0in/104.3 in
Tyres	φ381×127mm	φ15×5 in

Performance		
S.W.L	250kg	550lb
S.W.L On Extension	113kg	250lb
Max. Occupants(Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	3.5km/h	2.2mph
Travel Speed(Raised)	0.8km/h	0.5mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	72/67sec	72/67sec

Weight			
Overall Weight	3330kg	7326lb	

Power		
Hydraulic Tank	20L	5.3gal
Battery	24V/240Ah	24V/240Ah
Charger	24V/30A	24V/30A
Lifting Motor	15VAC/3.5kW	15VAC/3.5kW

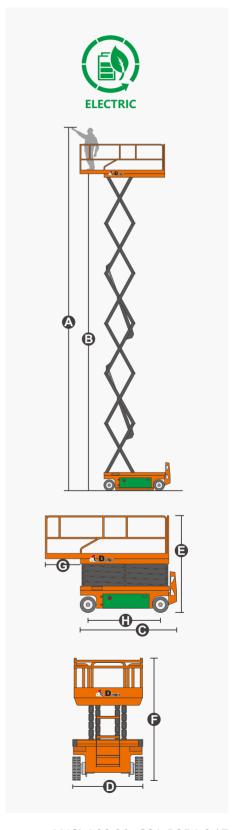

ANSI A92.20, CSA B354.6.17





FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- · Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- · Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- · Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deging, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











